

ACO DRAIN®

SlabDrain Leaflet

Introduction to the shallow channel SlabDrain System

H100K/H100SK – 100mm width, metallic edge channels

H200K/H200SK – 200mm width, metallic edge channels

H300K/H300SK – 300mm width, metallic edge channels



ACO DRAIN®

ACO Drain® is the leading modular trench drain system and is ideal for commercial applications ranging from petrol stations to airports.

ACO Drain® systems comprise Polycrete® Channels*, factory manufactured modular units made from corrosion resistant polymer concrete. Channels are to be used with grates from a variety of materials for all loading applications. ACO Drain® systems are available in 50mm, 100mm, 200mm and 300mm internal widths, and most systems have a built-in slope for up to 40 continuous metres.

The ACO Drain® brand is segmented into different product ranges, dependent on use.

1. Standard Products

KlassikDrain
PowerDrain
SlabDrain

2. Specialty Products

Brickslot
MiniKlassik
Grated Pits



SlabDrain

SlabDrain is available in 100mm, 200mm and 300mm widths and is a shallow invert trench drain comprising modular Polycrete® Channels*. The range is ideal where site depth restrictions are of concern. Each interconnecting unit is manufactured complete with integrally cast metal edge rails.

A variety of grates is available in different materials and styles up to load class G (AS 3996). This is equivalent to approximately 30 tonne wheel load. There is also a specialist range of grates marketed under the trademark, Heelsafe® Anti-Slip. These are pedestrian friendly grates with certified slip ratings to AS 4586.

For quick fitting and removal during installation and maintenance, most grates are locked down with a patented, barless and boltless mechanism, DrainLok or PowerLok.

* Polycrete® refers to ACO Products made from polymer concrete

Typical applications

- *Restricted depth applications*
- *Parking stations*
- *Elevated slabs*
- *Retro-fit*
- *Threshold applications*
- *Balconies*
- *Outdoor entertainment areas*



SlabDrain HK Series – Light to medium duty steel edged drains

H100K

100mm internal width
130mm external width

H200K

200mm internal width
260mm external width

H300K

300mm internal width
360mm external width

Wide choice of grates in a variety of materials and designs including Heelsafe® Anti-Slip grates.

Shallow depth
60mm, 80mm or 100mm (H100K)

Shallow depth
130mm (H200K)

Shallow depth
130mm (H300K)

Integrally cast-in galvanised steel edge rail provides additional strength and protects channel body from damage. (Stainless steel edge rail also available).


Profiled side walls provide channel strength and mechanical keying to concrete encasement.



DrainLok patented, barless and boltless locking system provides quick fitting and removal of grates. Helps reduce installation time, maintenance time and cost.

Knock-outs are included on all channels to allow vertical outlet connection to the pipework.

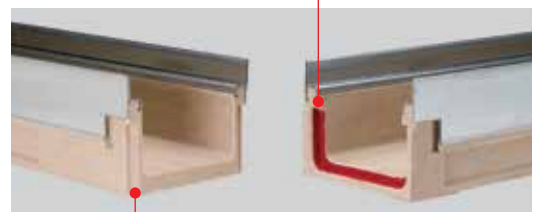


Parts table

H100K – 60, 80, 100												
												
	H100K-60 100mm internal width				H100K-80 100mm internal width				H100K-100 100mm internal width			
	Part No.	Invert ¹	Weight		Part No.	Invert ¹	Weight		Part No.	Invert ¹	Weight	
	Galv	S/S	mm	kg	Galv	S/S	mm	kg	Galv	S/S	mm	kg
Neutral channel (1m)	141803	141804	45	7.6	141785	141786	65	9.0	141787	141788	85	12.5
End cap	141805		60 ³	0.1	141793		80 ³	0.5	141794		100 ³	0.6
Debris strainer for 100mm drill-out	93488		–	0.1	93488		–	0.1	93488		–	0.1
Grate removal tool	01318		–	0.1	01318		–	0.1	01318		–	0.1

H200K					H300K				
									
	H200K 200mm internal width				H300K 300mm internal width				
	Part No.	Invert ²	Weight		Part No.	Invert ²	Weight		
	Galv	S/S	mm	kg	Galv	S/S	mm	kg	
Neutral channel (1m)	141789	141790	100	27.2	141791	141792	100	33.7	
End cap	141795		130 ³	1.0	141796		130 ³	1.4	
Debris strainer for 100mm drill-out	93488		–	0.1	93488		–	0.1	
Grate removal tool	01318		–	0.1	01318		–	0.1	

SF Sealant Groove – a groove is cast into the ends of every channel. The combined groove allows for a bead of appropriate flexible sealant to be inserted at joints, if required.



Interconnecting end profiles allow easy and effective joining of channels.

Notes:





1. H100K-60, H100K-80, H100K-100 overall channel depth add 15mm to invert depth.
2. H200K, H300K overall channel depth add 30mm to invert depth.
3. Overall depth of end caps.

SlabDrain HK Series DrainLok grates






H100K grates

Length mm Part No. Wgt kg    










LOAD CLASS A – AS 3996 – 10kN – approximate wheel load 330kg

	Type 494D Black Plastic Intercept Heelsafe® Anti-Slip	500	142459	0.8	✓	✓	✓	✓
	Type 495D Grey Plastic Intercept Heelsafe® Anti-Slip	500	142460	0.8	✓	✓	✓	✓
	Type 420D/421D Galv Slotted	1000 500	12610 12611	2.7 1.4	✓	✗	✓	✗
	Type 450D/452D Stainless Slotted	1000 500	12640 12641	2.7 1.4	✓	✗	✓	✗

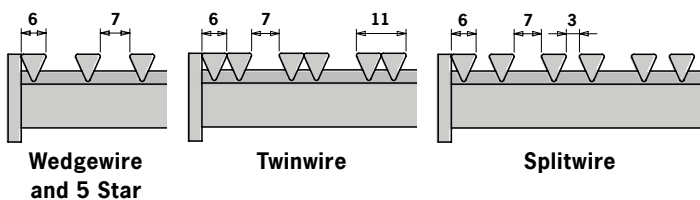
LOAD CLASS B – AS 3996 – 80kN – approximate wheel load 2,670kg

	Type 447D/448D Stainless Wedgewire¹ Heelsafe® Anti-Slip	1000 500	142215 142216	3.2 1.6	✓	✓	✓	✓
	Type 443D/444D Stainless 5 Star¹ Heelsafe® Anti-Slip	1000 500	142217 142218	3.2 1.6	✓	✓	✓	✓
	Type 441D/442D Stainless Twinwire¹ Heelsafe® Anti-Slip	1000 500	142556 142557	4.4 2.2	✓	✓	✓	✓
	Type 439D/440D Stainless Splitwire¹ Heelsafe® Anti-Slip	1000 500	142569 142570	4.4 2.2	✓	✓	✓	✓
	Type 438D/437D Galv Longitudinal¹ Heelsafe® Anti-Slip	1000 500	132555 132550	4.0 2.1	✓	✓	✓	✓

LOAD CLASS D – AS 3996 – 210kN – approximate wheel load 8,000kg

	Type 492D Plastic Slotted¹ Heelsafe® Anti-Slip	500	132720	1.0	✓	✓	✓	✓
	Type 425D/426D Galv Slotted	1000 500	12614 12615	4.0 2.0	✓	✗	✓	✗
	Type 455D/457D Stainless Slotted	1000 500	12644 12645	4.0 2.0	✓	✗	✓	✗
	Type 405Q/406Q Galv Mesh²	1000 500	142401 142402	4.3 2.2	✗	✗	✓	✗
	Type 430Q/431Q Stainless Mesh²	1000 500	142403 142404	4.1 2.1	✗	✗	✓	✗
	Type 480D Iron Wave¹ Heelsafe® Anti-Slip	500	142461	4.5	✓	✓	✓	✓
	Type 460D Iron Slotted	500	12670	4.6	✓	✗	✓	✗
	Type 476D Iron Intercept¹ Heelsafe® Anti-Slip	500	142171	5.8	✓	✓	✓	✓
	Type 475D Iron Galv Intercept¹ Heelsafe® Anti-Slip	500	142172	5.8	✓	✓	✓	✓






Stainless Wire Cross-sections









H200K grates

Length mm Part No. Wgt kg    

LOAD CLASS B – AS 3996 – 80kN – approximate wheel load 2,670kg

	Type 647D/648D Stainless Wedgewire¹ Heelsafe® Anti-Slip	1000 500	142219 142220	7.5 3.7	✓	✓	✓	✓
	Type 643D/644D Stainless 5 Star¹ Heelsafe® Anti-Slip	1000 500	142221 142222	7.5 3.7	✓	✓	✓	✓
	Type 641D/642D Stainless Twinwire¹ Heelsafe® Anti-Slip	1000 500	142558 142559	9.0 4.5	✓	✓	✓	✓
	Type 639D/640D Stainless Splitwire¹ Heelsafe® Anti-Slip	1000 500	142571 142572	9.0 4.5	✓	✓	✓	✓
	Type 607Q/608Q Galv Transverse²	1000 500	142411 142412	7.8 4.2	✗	✗	✓	✗

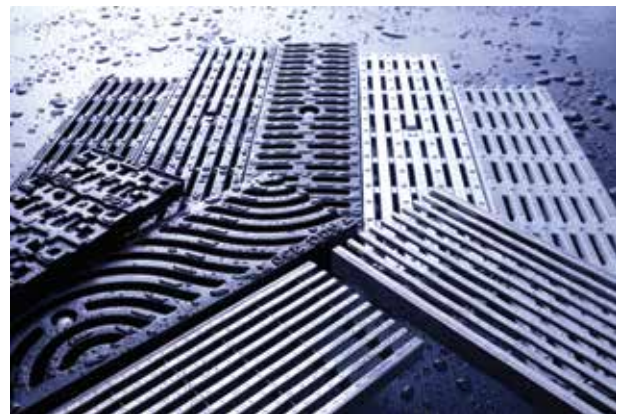
LOAD CLASS D – AS 3996 – 210kN – approximate wheel load 8,000kg

	Type 605Q/606Q Galv Mesh²	1000 500	142405 142406	13.8 7.1	✗	✗	✓	✗
	Type 630Q/631Q Stainless Mesh²	1000 500	142407 142408	13.0 6.6	✗	✗	✓	✗
	Type 680D Iron Wave¹ Heelsafe® Anti-Slip	500	142462	12.7	✓	✓	✓	✓
	Type 660D Iron Slotted	500	142177	12.0	✓	✗	✓	✗
	Type 676D Iron Intercept¹ Heelsafe® Anti-Slip	500	142173	10.0	✓	✓	✓	✓
	Type 675D Iron Galv Intercept¹ Heelsafe® Anti-Slip	500	142174	10.0	✓	✓	✓	✓

Heelsafe® Anti-Slip grates



ACO believes that pedestrian friendly grates and slip resistance go hand in hand. The grates with the trademark, **Heelsafe® Anti-Slip** comply to AS 3996, AS 4586 and all the specific user requirements described opposite. For more information visit www.heelsafe.com.au








SlabDrain's Heelsafe® Anti-Slip grate range (HK Series)




H300K grates

Length mm Part No. Wgt kg    

LOAD CLASS B – AS 3996 – 80kN – approximate wheel load 2,670kg

 <small>See Below</small>	Type 847D/848D Stainless Wedgewire¹ Heelsafe® Anti-Slip	1000	142223	12.5	✓	✓	✓	✓
	500	142224	6.2	✓	✓	✓	✓	
 <small>See Below</small>	Type 843D/844D Stainless 5 Star¹ Heelsafe® Anti-Slip	1000	142225	12.5	✓	✓	✓	✓
	500	142226	6.2	✓	✓	✓	✓	
 <small>See Below</small>	Type 841D/842D Stainless Twinwire¹ Heelsafe® Anti-Slip	1000	142560	15.1	✓	✓	✓	✓
	500	142561	7.6	✓	✓	✓	✓	
 <small>See Below</small>	Type 839D/840D Stainless Splitwire¹ Heelsafe® Anti-Slip	1000	142573	15.1	✓	✓	✓	✓
	500	142574	7.6	✓	✓	✓	✓	
	Type 807Q/808Q Galv Transverse²	1000	142413	12.4	✗	✗	✓	✗
	500	142414	6.3	✗	✗	✓	✗	

LOAD CLASS D – AS 3996 – 210kN – approximate wheel load 8,000kg





	Type 805Q Galv Mesh²	500	142409	12.7	✗	✗	✓	✗
	Type 830Q Stainless Mesh²	500	142410	15.1	✗	✗	✓	✗
	Type 880D Iron Wave¹ Heelsafe® Anti-Slip	500	142463	21.8	✓	✓	✓	✓
	Type 860D Iron Slotted	500	13870	19.0	✓	✗	✓	✗
	Type 876D Iron Intercept¹ Heelsafe® Anti-Slip	500	142175	15.9	✓	✓	✓	✓
	Type 875D Iron Galv Intercept¹ Heelsafe® Anti-Slip	500	142176	15.9	✓	✓	✓	✓

¹ Meets ASME A112.6.3 Section 7.12 (American high heel standard).

² Denotes QuickLok grates. QuickLok bar included in grate Part Number.

Specific user requirements

ACO's grates meet some or all of the legislative requirements described below:

-  Wheelchair compliant to AS 1428.2, Clause 9(c). Slots cannot exceed 13mm (width), 150mm (length). Longitudinal grates are to be placed at right angles to the principal direction of travel.
-  Grates designed to resist the penetration of a 10mm heel.
-  Bicycle tyre penetration resistant to AS 3996. Criteria on slot length dependant on slot width.
-  Pedestrian safe grates with slip resistance, rated to AS 4586.

DrainLok – barless and boltless locking system



Fast locking device removes the need for bars and bolts and improves the channels hydraulic capacity. The DrainLok mechanism simply clips into the channel edge rail for quick installation. ACO's DrainLok grates are fitted with anti-shunt lugs that restrict grate movement when installed, improving durability and longevity of the system.



1

PLACE GRATE

Position grate onto channel and align anti-shunt lugs with the recess in the rail.



2

SECURE GRATE

Push down or stand on the grate until it clicks into position.



3

GRATE REMOVAL

To remove first grate, insert grate removal tool into slots at the end of the grate and pull up sharply. Remaining grates can be removed by hand.

SlabDrain HSK Series – Heavy duty iron edged drains

H100SK

100mm internal width
160mm external width

H200SK

200mm internal width
260mm external width

H300SK

300mm internal width
360mm external width

Ductile iron grates – heavy duty grates to load class G (approx. 30 tonne wheel load).

'Anti-shunt' lugs – recesses in grate fit around lugs on the edge rail to prevent longitudinal movement.

Integrally cast-in ductile iron edge rail – provides maximum strength and protection for channel body.

Shallow depth
100mm (H100SK)

Profiled side walls – provide channel strength and mechanical keying to concrete encasement.

Shallow depth
130mm (H200SK)

PowerLok – a patented, barless and boltless locking system that provides quick fitting and removal of grates.

Shallow depth
130mm (H300SK)




SF Sealant Groove – a groove is cast into the ends of every channel. The combined groove allows for a bead of appropriate flexible sealant to be inserted at joints, if required.

Knock-outs are included on all channels to allow vertical outlet connection to the pipework.

Interconnecting end profiles allow easy and effective joining of channels.



Parts table

	 H100SK 100mm internal width			 H200SK 200mm internal width			 H300SK 300mm internal width		
	Channel Part No.	Invert ¹ mm	Weight kg	Channel Part No.	Invert ² mm	Weight kg	Channel Part No.	Invert ² mm	Weight kg
Neutral channel (1m)	93412	75	20.4	63456	100	27.6	63466	100	37.3
End cap	97334	100 ³	0.5	93460	130 ³	0.5	93470	130 ³	0.6
Debris Strainer for 100mm knockout	93488	–	0.1	93488	–	0.1	–	–	–
Grate removal tool	01318	–	0.1	01318	–	0.1	01318	–	0.1
PowerLok safety clip	10443	–	–	10443	–	–	10443	–	–

Notes:



- H100SK overall channel depth, add 25mm to invert depth.
- H200SK, H300SK overall channel depth, add 30mm to invert depth.
- Overall depth of end caps.



SlabDrain HSK Series PowerLok grates



H100SK grates

Length mm Part No. Wgt kg    

LOAD CLASS G – AS 3996 – 900kN – approximate wheel load 30,000kg								
	Iron Slotted	500	96082	5.6	✓	✗	✓	✗
	Iron Intercept ¹ Heelsafe® Anti-Slip	500	141299	6.8	✓	✓	✓	✓



H200SK grates

Length mm Part No. Wgt kg    

LOAD CLASS G – AS 3996 – 900kN – approximate wheel load 30,000kg								
	Iron Slotted	500	71976	14.5	✗	✗	✓	✗
	Iron Intercept ¹ Heelsafe® Anti-Slip	500	142685	8.5	✓	✓	✓	✓

H300SK grates





Length mm Part No. Wgt kg    

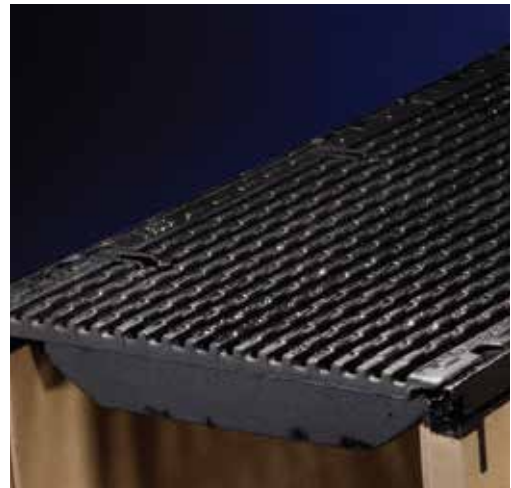
LOAD CLASS G – AS 3996 – 900kN – approximate wheel load 30,000kg								
	Iron Slotted	500	02445	24.4	✗	✗	✓	✗
	Iron Intercept ¹ Heelsafe® Anti-Slip	500	142686	15.0	✓	✓	✓	✓

¹ Meets ASME A112.6.3 Section 7.12 (American high heel standard).

Specific user requirements

ACO's grates meet some or all of the legislative requirements described below:

-  AS 1428.2, Clause 9(c) – slots cannot exceed 13mm (width); 150mm (length). Longitudinal grates need to be placed at right angles to the principal direction of travel.
-  Grates designed to resist the penetration of a 10mm heel.
-  Bicycle tyre penetration resistance to AS 3996. Criteria on slot length dependant on slot width.
-  Pedestrian safe grates with slip resistance. Rated to AS 4586.



Iron Intercept Heelsafe® Anti-Slip grate

PowerLok – barless and boltless locking system



To open PowerLok, insert tool between rail and PowerLok device.



Rotate tool 90°; PowerLok device should push away from rail.



To close, place hook part of tool into 'V' and push towards rail.

PowerLok – safety clip (optional)



For areas of security or safety concerns, the PowerLok safety clip provides a visual alert to confirm the grate is locked and secure.



The safety clip push-fits next to the locked PowerLok device. Safety clip sits flush with grate surface and grate cannot be unlocked.



To open PowerLok device, the safety clip must be removed. If no red block is visible, the locking is not guaranteed. This provides a visual alert that grates may not be locked.



Other ACO DRAIN® systems

KlassikDrain

The most widely used general purpose drain available in 100mm, 200mm and 300mm internal widths with a wide range of grates.

PowerDrain

A heavy duty trench drainage system available in 100mm, 200mm and 300mm internal widths.

Brickslot

A discreet continuous slot drainage solution for brick or stone pavers.

MiniKlassik

A compact grated trench drain for small-scale areas.

Grated Pits

A range of grated pits and risers made from polymer concrete.

ACO Polycrete Pty Ltd

ABN 65 050 102 942

www.acoaus.com.au

Sales Hotlines

Australia 1300 765 226

New Zealand 0800 448 080

International +61 2 4747 4000

Email sales@acoaus.com.au

Technical Services

Email technical@acoaus.com.au

NSW & Head Office

134-140 Old Bathurst Road

Emu Plains NSW 2750

Telephone +61 2 4747 4000

Facsimile +61 2 4747 4040

acoaws@acoaus.com.au

QLD

467 Tufnell Road

Banyo QLD 4014

Telephone (07) 3292 4500

Facsimile (07) 3292 4599

acoqld@acoaus.com.au

VIC & TAS

9 Overseas Drive

Noble Park VIC 3174

Telephone (03) 9790 8800

Facsimile (03) 9790 8899

acovic@acoaus.com.au

WA

33-35 Sorbonne Crescent

Canning Vale WA 6155

Telephone (08) 6250 3700

Facsimile (08) 6250 3799

acowa@acoaus.com.au

SA & NT

Unit 14, 17-19 Churchill Road North

Dry Creek SA 5094

Telephone (08) 8162 7800

Facsimile (08) 8162 7899

acosa@acoaus.com.au



**Quality
Endorsed
Company**

ISO 9001
QEC 1883
SAI Global
Assurance Services

LE0028
(2017-3000)