


Typical system layout – TD200 / TD300

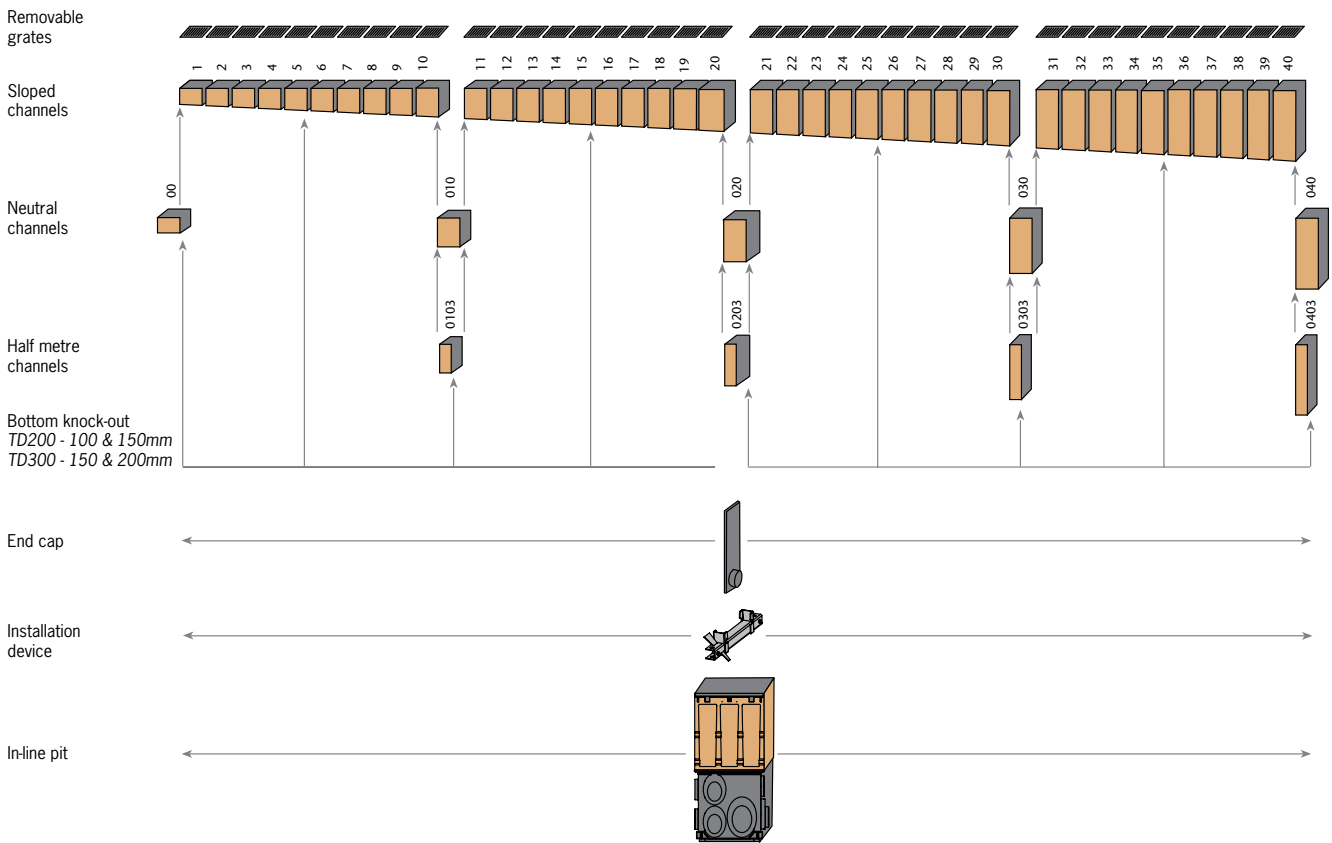


In-line pit options

Polymer concrete in-line pits are most commonly used as the outlet to the underground pipework for a trench run. They provide the highest hydraulic output and allow easy access to the pipe system for maintenance.

Type 900 in-line pits are the same width as the trench run.

The polymer concrete in-line top enables the same grate to be used as the trench run for a seamless finish.

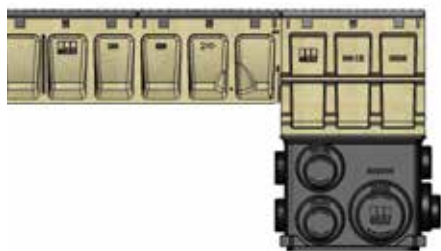

TD3-614 in-line pit allows for connection through the long side wall with a reinforced concrete pipe up to DN375.

