








This grate is part of ACO's Heelsafe® Anti-Slip range. For more information visit www.heelsafe.com.au


Product Features

-  Certified to AS 3996 Load Class D (210kN)² (NATA endorsed load test reports available)
-  AS 3996 (Clause 3.3.5) compliant for surface openings in pedestrian areas
ASME A112.6.3 (Section 7.12) compliant - American high heel standard
-  AS 4586: P2 – Slip resistance classification for Wet Pendulum Test
AS 4586: R10/R9¹ - Slip resistance classification for Oil-Wet Inclining Platform Test
-  AS 1428.2 (Clause 9c) compliant for wheelchair and walking cane safety
-  AS 3996 (Clause 3.3.6) compliant for bicycle tyre penetration resistance

- Suitable for use with M50, M50KS channels
- Manufactured from ductile iron to ASTM A536-84 Grade 65-45-12 which is similar to AS 1831 Grade 400-15

¹ Test direction (perpendicular/parallel) relative to the grate's length (NATA endorsed test reports available)

² This grate is designed for a channel with a clear opening of 75mm or greater. Test report available for Type 478Q, a wider version of this grate.

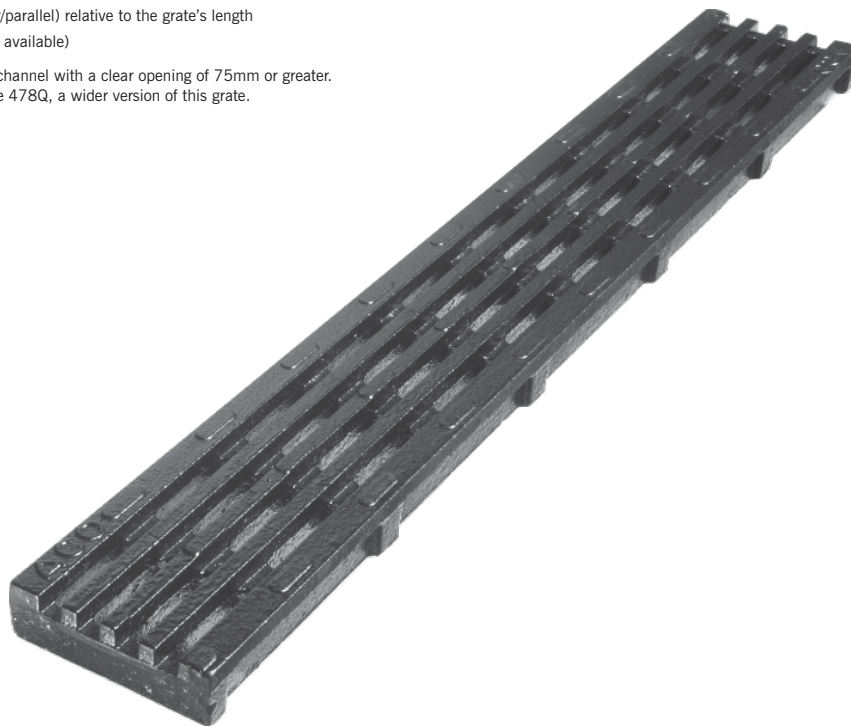

Specifications

The grate shall be ACO M50K/M50KS Iron Intercept Heelsafe® Anti-Slip grate as manufactured by ACO. This grate has an overall width of 73.5mm and overall length of 500mm. Slot widths measure at a maximum of 7.5mm.

Materials & Design

The grate shall be manufactured from ductile iron and have **minimum** properties and characteristics as follows:

- Manufactured from ductile iron to ASTM A536-84 Grade 65-45-12 which is similar to AS 1831 Grade 400-15
- Certified to AS 3996 Load Class D (210kN)²
- AS 4586: P2 – Slip resistance classification for Wet Pendulum Test²
- AS 4586: R10/R9¹ – Slip resistance classification for Oil-Wet Inclining Platform Test²
- Meets AS 1428.2 (Clause 9c); AS 3996 (Clause 3.3.5 & 3.3.6); ASME A112.6.3 (Section 7.12)
- Intake area of 11,225mm² per half metre of grate

¹ Test direction (perpendicular/parallel) relative to the grate's length

² This grate is designed for a channel with a clear opening of 75mm or greater. Test report available for Type 478Q, a wider version of this grate.


For the specification of the ACO Drain channel system selected, click: <http://www.acodrain.com.au/resources>

ACO Specification Information



ACO DRAIN®

M50K/M50KS Iron Intercept Heelsafe® Anti-Slip grate

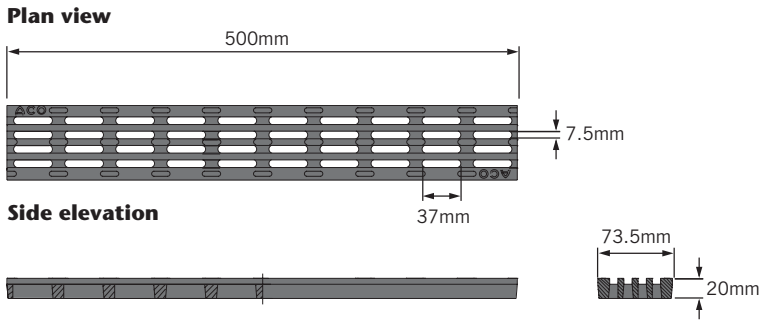

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
Non locking grate				
M50K/M50KS Iron Intercept Heelsafe® Anti-Slip	95553	500	73.5	3.3
Grate removal tool	01318	-	-	0.1

ACO Polycrete Pty Ltd
Australia

Ph: 1300 765 226
www.acodrain.com.au
sales@acoaus.com.au

ACO Limited
New Zealand

Ph: 0800 448 080
www.acodrain.co.nz
sales@aconz.co.nz



© April, 2014 ACO Polycrete Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Polycrete Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.